

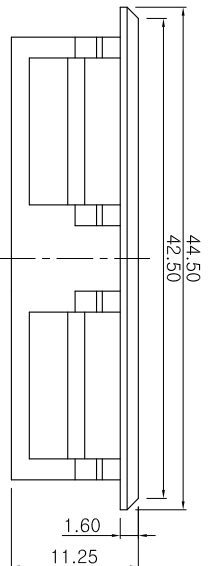
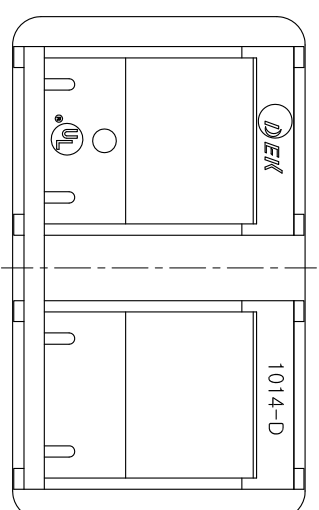


NOTE

1. PRODUCT TO BE FREE OF DEFECTS SUCH AS FLASH, SCRATCH, WELD-LINE, SINK-MARK, TWIST, ETC.
2. LOCATIONS OF GATES, PARTING-LINE, AND EJECTOR PINS MUST BE APPROVED BY DEK R&D TEAM, PRIOR TO MOLD CONSTRUCTION.
3. PRODUCT MUST MATCH ITS COUNTERPART.
4. INTERNAL SURFACES TO BE FINISHED PER SANDING.
5. EXTERNAL SURFACE TEXTURE IS K-106.
6. OTHERWISE TOLERANCE .0=+0.10, .00=+0.05
7. ECCENTRICITY OF CENTERLINE WILL BE MAX0.02
8. TWIST OF BENT BE MAX0.05
9. FLASH WILL PERMITTED MAX0.05

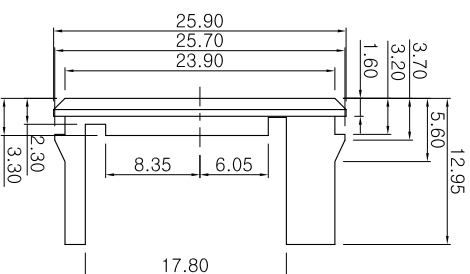

部 番		PART NO.	名 稱		TITLE	材 料	MATERIAL	規 格	SPECIFICATION	處 理	TREATMENT	備 考	REMARK
						三角法	THIRD ANGLE	單位	UNIT	尺 度	SCALE	提出先	DEK 1014-D
						PROJECTION		100	INCH	N	/S	USER	
						委 認	APPROVAL	檢 圖	CHECK	設 計	DESIGN	圖 名	K/JACK FRONT COVER(2PORT)
												圖 番	
MARK	DATE	APPR	CHECK	DESIGN								DRAWG. NO.	3DB-1670

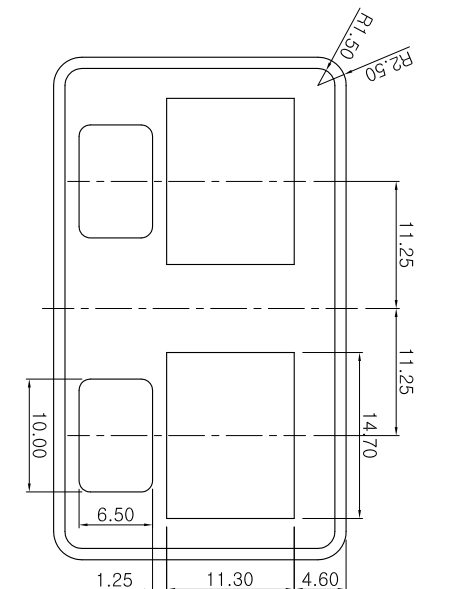